






Rubber Conveyor Belts
Chevron

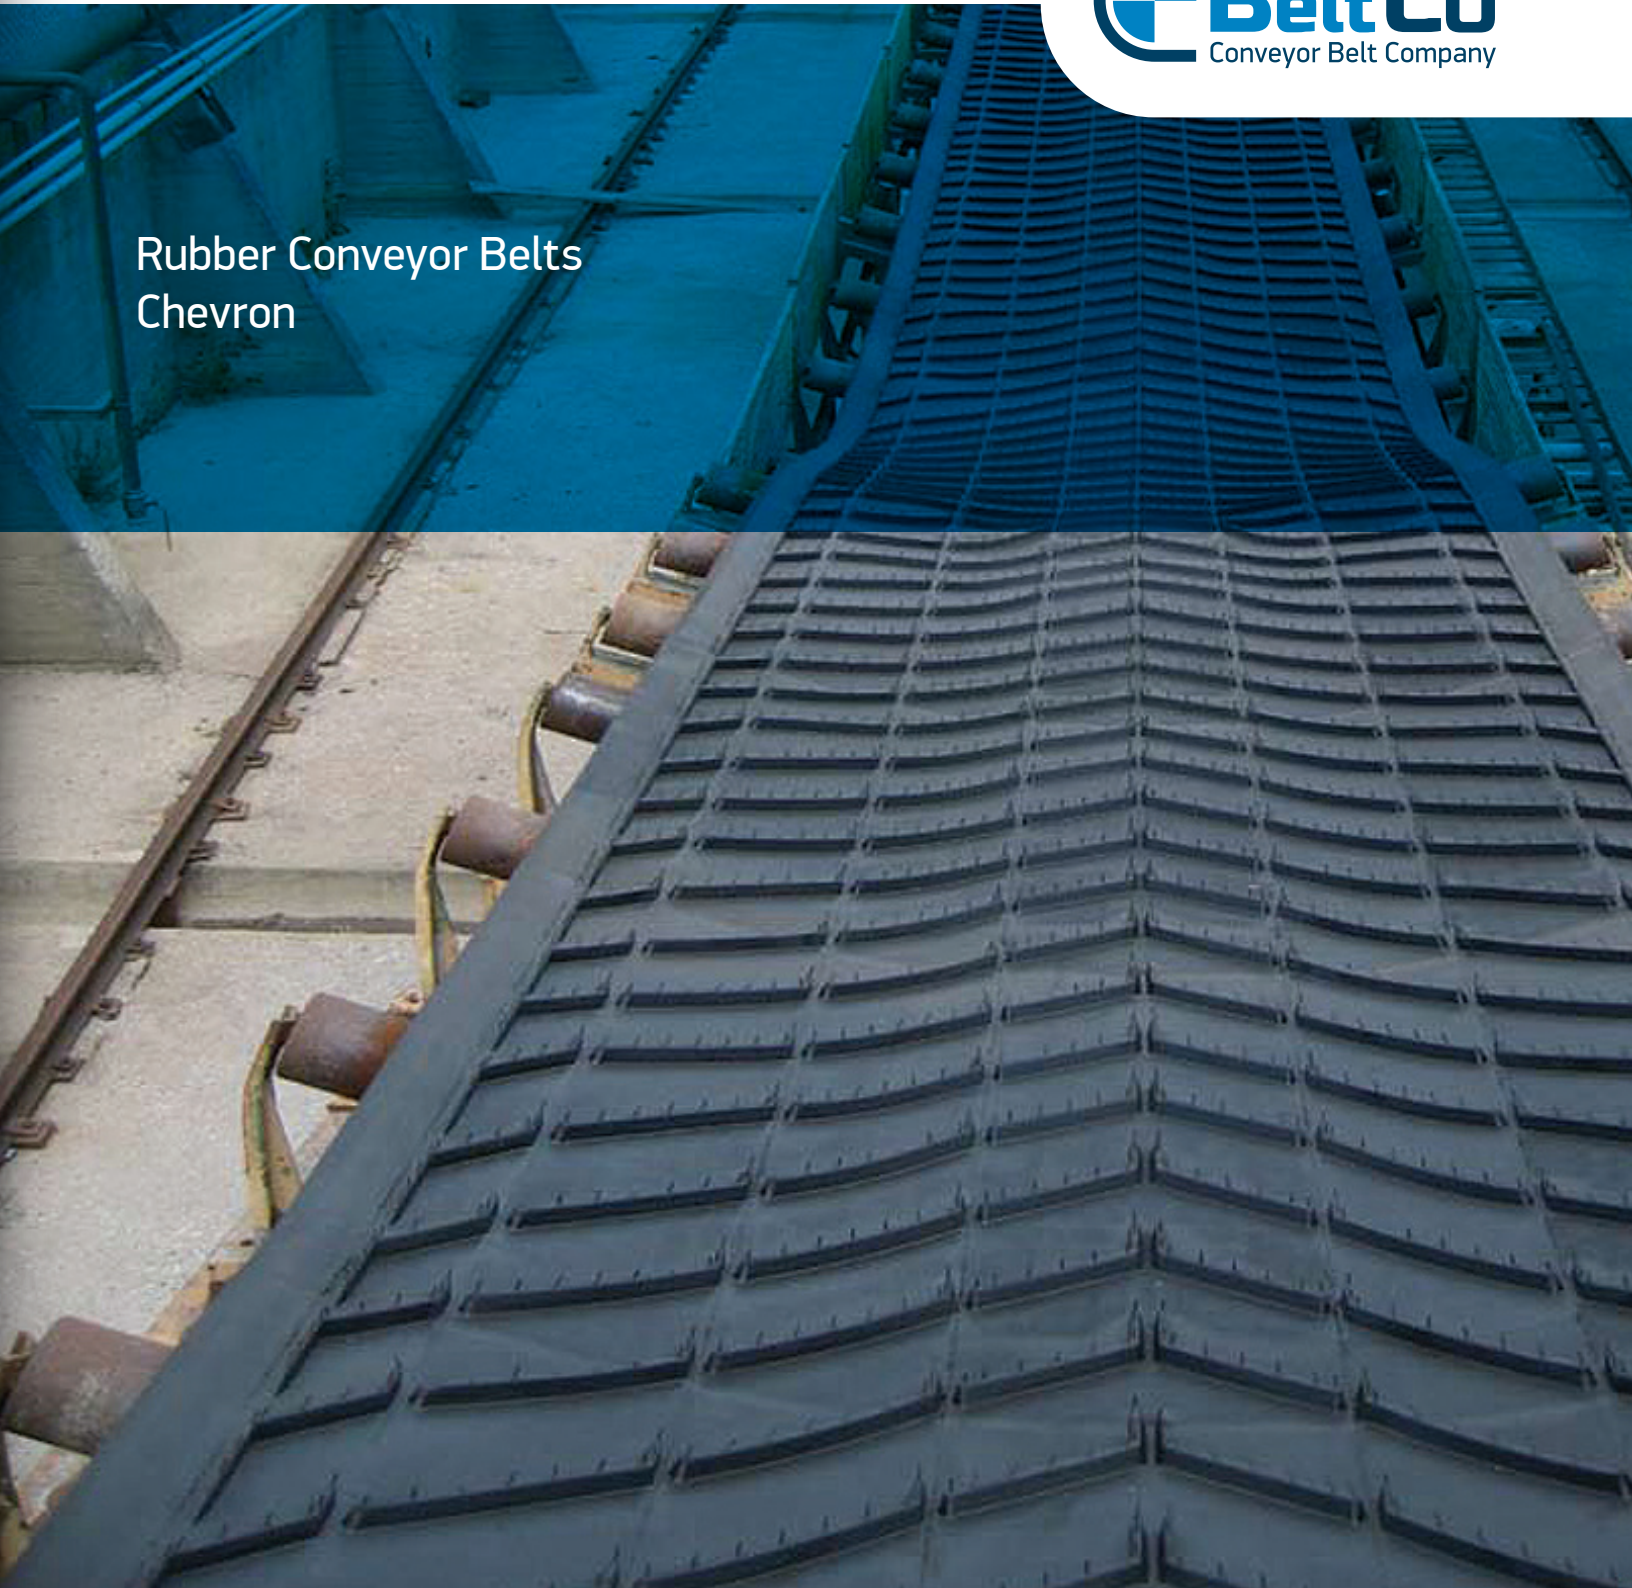

Chevron Conveyor Belts

- Excellent physical property of rubber, high adhesion and fatigue resistance
- Integrated vulcanized cover and cleat rubber prevent the chevron belt cleat from coming off.
- Better cleat rubber property and abrasion extend the useful life
- Its adjustable design for various chevron conveyor belt by incline angle from range of 16° - 45°.
- Excellent drainage character.

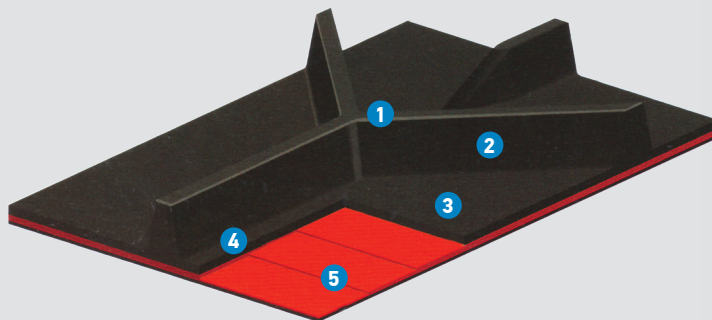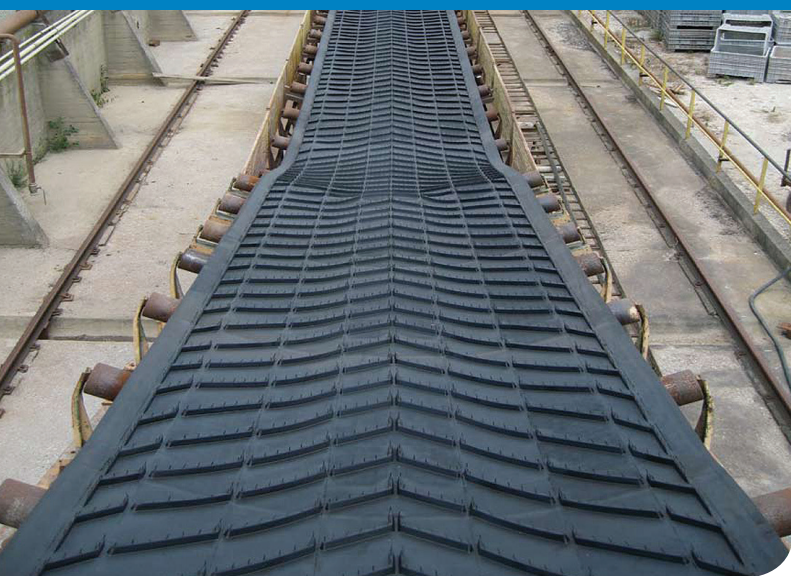


APPLICATIONS

Chevron conveyor belt is designed for inclined transportation for conveying bulk material such as coal, sand, mineral, crop, package and bag depending on different loading material and inclined angle to choose suitable cleat height and chevron type to prevent loading material from dropping down.


Ports and transshipment operations / Wood industry / Smelteries / Coal-fired power plants / Agriculture / Recycling industry / Sand and gravel industry / Others

STRUCTURE


1. Excellent weather resistance and property of cleat, not easy to crack and become deformed.
2. High abrasive high tensile cleats.
3. Good flexibility and tear resistance.
4. Integrated vulcanized cleats and base belt prevent the cleats from coming off.
5. Different rubber property and carcass strength can be designed according to requirement.

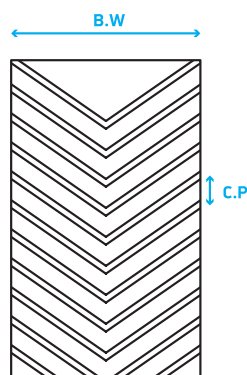


C5

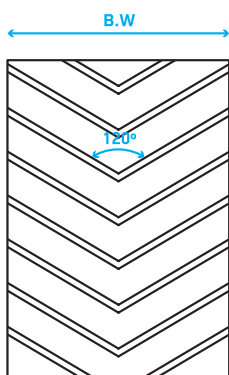

C10

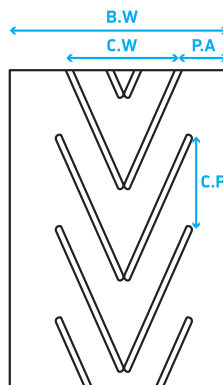


C127 P1067

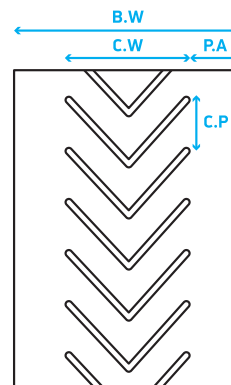


C15 P450


CHEVRON TYPE	PATTERN	BELT WIDTH	CLEAT WIDTH	CLEAT PITCH	CLEAT HEIGHT
C5	C5	300-1200 mm	Full width or appointed width	100 mm	5 mm
C10	10	500-1200 mm	Full width or appointed width	150 mm	10 mm
C127	C127P850	900-1500 mm	850 mm	295 mm	12,7 mm
	C127P1067	1200-1500 mm	1067 mm	381 mm	12,7 mm
C15	C15	500-1200 mm	Full width or appointed width	200 mm	15 mm
	C15V330	400-800 mm	330 mm	250 mm	15 mm
	C15V450	500-800 mm	450 mm	250 mm	15 mm
	C15V380	450-800 mm	380 mm	250 mm	15 mm
	C15V600	650-900 mm	600 mm	250 mm	15 mm
	C15V740	800-1200 mm	740 mm	250 mm	15 mm
C17	C17P300	350-800 mm	300 mm	330 mm	17 mm
	C17P440	500-800 mm	440 mm	330 mm	17 mm
	C17P550	600-800 mm	550 mm	330 mm	17 mm
	C17P630	700-850 mm	630 mm	330 mm	17 mm
	C17P750	800-1000 mm	750 mm	330 mm	17 mm
	C17P950	1000-1200 mm	950 mm	330 mm	17 mm
	C17P1050	1200-1500 mm	1050 mm	330 mm	17 mm
C25	C25P450	500-750 mm	450 mm	250 mm	25 mm
	C25P550	600-1000 mm	550 mm	250 mm	25 mm
	C25P750	900-1200 mm	750 mm	330 mm	25 mm
	C25P1000	1000-1500 mm	1000 mm	450 mm	25 mm
Y32	Y32P600	650-1000 mm	600 mm	300 mm	32 mm
	Y32P800	900-1200 mm	800 mm	333 mm	32 mm
C32	C32P460	500-800 mm	460 mm	330 mm	32 mm
	C32P580	600-800 mm	580 mm	330 mm	32 mm
	C32P630	700-1000 mm	630 mm	330 mm	32 mm
	C32P750	900-1200 mm	750 mm	330 mm	32 mm
	C32P950	1000-1500 mm	950 mm	330 mm	32 mm

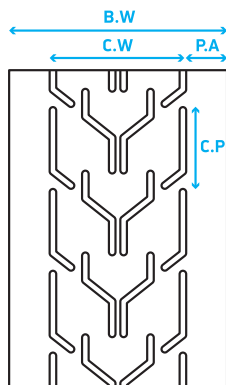


C17 P440

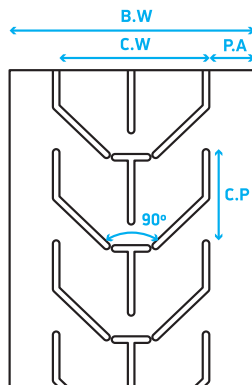

C25 P450

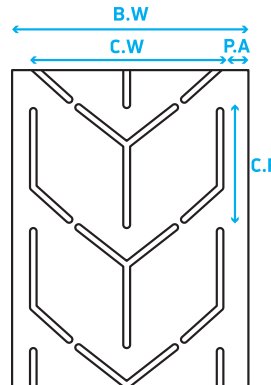

Y32 P800

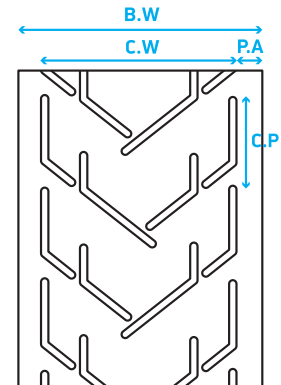

C32 P750



Headquarters:

Lerchenweg 2
63762 Grossostheim
Germany

Technical Dept.:

info@beltco.com

Sales Dept.:

sales@beltco.com

 fb.com/BeltCoConveyorBelts

 linkedin.com/company/beltco

www.beltco.com

Official Dealer: